

Resistivity Management Unit CO₂ Injector

High-Quality Processing Through Direct Link to Dicing Saw



Workpiece Charge-up Significantly Reduced


The CO₂ Injector lowers the resistivity of purified water to 1MΩ·cm or less by dissolving carbon dioxide gas in the dicing coolant. Once the user-set resistivity is reached, the CO₂ Injector maintains this level with a high degree of accuracy. By lowering the degree of static charge the workpiece acquires during cutting, the CO₂ Injector helps prevent particle adhesion and device damage caused by static electricity.

Highly Stable Resistivity

The CO₂ Injector was designed especially for dicing saw, in which, owing to processing requirements, the flow rate of coolant is extremely variable. By using resistivity sensor feedback and a special multi-stage mixing system, the CO₂ Injector is able-in two distinct steps--to dose the coolant with CO₂ at a high degree of precision and accuracy. This accuracy and precision is preserved even when coolant flow stops or starts; a constant flow of coolant is therefore unnecessary.



Resistivity Management Unit CO₂ Injector

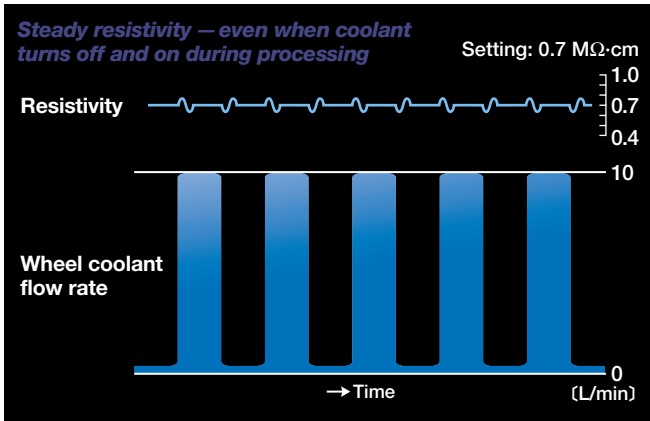

Resistivity vs. coolant flow (schematic)

Easy Control Via Direct Link to Dicing Saw

The CO₂ Injector is easily controlled through the dicing saw's interface, allowing for real-time monitoring of coolant flow and resistivity during cutting. To protect yield, settings allow for alarm activation or process termination when user-specified tolerances are exceeded.

Logging of Resistivity Measurements

The CO₂ Injector may be set to log resistivity measurements automatically when dicing saw function is initiated, when the dicing of each wafer is complete, and when an alarm is activated. This logging function can be a valuable contributor to process quality design and management.

Compact Size and Dicing Saw Build-in

The CO₂ Injector fits neatly within the case of DFD6240, DFD6340, DFD6450 and DFD6361.

Compatibility with DFD600 Series

Able to connect with DFD600 series as stand-alone version (limited to some models)



Dicing saw control screen



CO₂ Injector information

CO₂ Injector Specification

Resistivity setting range	MΩ·cm	0.5 - 1.0
Resistivity fluctuation range		Setting ±10 % *
Utilities	DC power supply (from dicing saw)	v 24
	Max. power consumption	w 20
Wheel coolant requirements		
	Pressure	MPa 0.20~0.50**
	Temperature	°C 20~25
	Flow rate	L/min 3~15
CO ₂		
	Supply pressure	MPa 0.15~0.35
	Regulator setting	MPa 0.10
CO ₂ consumption (at coolant flow rate of 15 L/min)		
	at 1.0 MΩ·cm	g/h Approx.1.74
	at 0.5 MΩ·cm	g/h Approx.3.54
	Machine dimensions (W x D x H)	mm 328.0 x 178.0 x 366
	Machine weight	kg Approx. 7 (when dry) Approx. 10 (when in use)

* This range applies when coolant flow rate is 3~15 L/min and coolant temperature is 20~25 °C.
** In order to insure accuracy of resistivity, coolant water pressure must be kept higher than CO₂ gas pressure.

Environmental conditions

- Use CO₂ gas free of oil and other contaminants (99.5 % pure or higher). Further, use of a gas filter (0.3 μm or less) is recommended.
- Keep room temperature between 20~25 °C.
- Keep spindle cooling water the same as room temperature (fluctuations within ±1 °C).
- The machines should be used in an environment free from external vibration.
Do not install machine near a ventilation opening, heat generation equipment or oil mist generating parts.
- This machine uses water.
In case of water leakage, please install the machine on the floor with sufficient waterproofing and drainage treatments.


* This machine does not include a CO₂ gas canister or regulator.

* All pressures specified above are gauge pressures.

* As the above specification may change due to technical modifications.

Please confirm when placing your order.

* For further information, please contact your local sales representative.

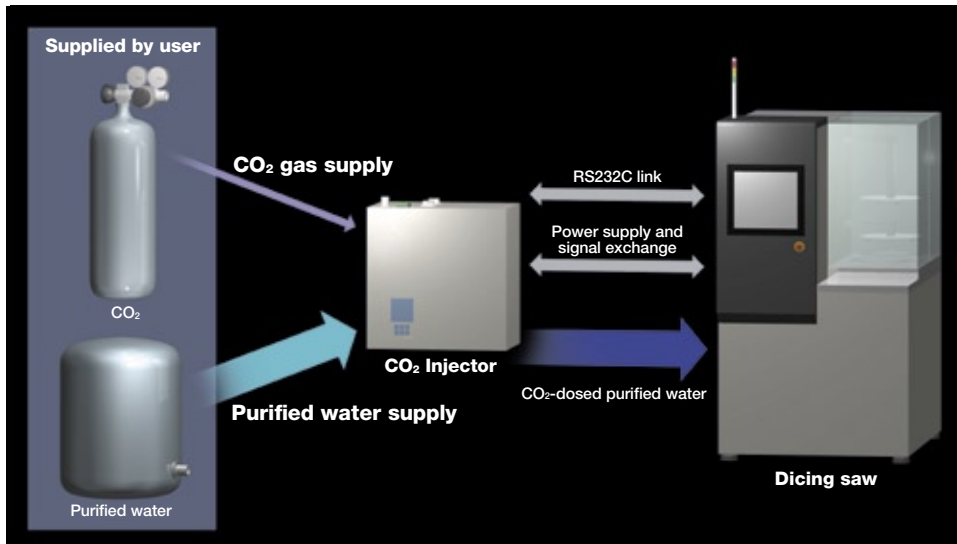

Configuration of CO₂ Injector, dicing saw, and utilities



Location of CO₂ Injector in dicing saw

DISCO



ASIA :
DISCO HI-TEC (SINGAPORE) PTE. LTD.
 Blk 2 Kaki Bukit Ave.1 #03-06/08 Kaki Bukit
 Industrial Estate Singapore 417938
 Phone: 65-6747-3737 Fax: 65-6745-0266
DISCO HI-TEC (MALAYSIA) SDN. BHD.
 Penang Regional Office
 Phone: 60-3-8024-6588 Fax: 60-3-8024-1311
DISCO HI-TEC (THAILAND) CO., LTD.
 Phone: 66-2-618-8441 Fax: 66-2-618-8440
DISCO TECHNOLOGY (SHANGHAI) CO., LTD.
 Area E, 3rd Floor, Building A1 No.381 FuTeXiYi Road,
 WaigaoQiao Free Trade Zone, Shanghai 200131 P.R. CHINA
 Phone: 86-21-58662516 Fax: 86-21-58662517
 Tianjin Service & Technical Support Center
 Phone: 86-022-24381973 Fax: 86-022-24381637
 Dongguan Service & Technical Support Center
 Phone: 86-769-86334981 Fax: 86-769-86334559
 Suzhou Office
 Phone: 86-512-67629081 Fax: 86-512-67629082

DISCO CORPORATION

13-11 Omori-Kita 2-chome, Ota-ku, Tokyo 143-8580, Japan
 Tel:03-4590-1100 Fax:03-4590-1075 • www.disco.co.jp

Chengdu Office
 Phone: 86-28-86528592 Fax: 86-28-86528591

USA AGENT :
New Tronics Co., Ltd.
 Flat F, 11th Floor, Valiant Ind. Bldg. 2-12 Au Pui Wan Street,
 Fotan Shantin, N.T. HONG KONG
 Phone: 852-26871431 Fax: 852-26874283

Happy Pole, Ltd.
 8F-1, No.41 Section 2, Roosevelt Road Taipei, Taiwan R.O.C.
 Phone: 886-2-23980651 Fax: 886-2-23943943

Aurotech Corporation
 2021 Buencamino Street Alabang, Muntinlupa PHILIPPINES
 Phone: 63-2-809-0155 Fax: 63-2-807-7419

DHK Solution Corporation
 13F, Sankak Jadan Building, 1337-31, Seocho-dong, Seocho-gu, Seoul, Korea
 Phone: 82-2-3415-1122 Fax: 82-2-3415-1441

U.S.A. :
DISCO HI-TEC AMERICA, INC.
 3270 Scott Blvd. Santa Clara, CA 95054-3011 U.S.A.
 Phone: 1-408-987-3776 Fax: 1-408-987-3785

Eastern Regional Sales & Service Office
 Phone: 1-603-656-9019 Fax: 1-603-656-9018
 Southeastern Regional Sales & Service Office
 Phone: 1-919-468-6003 Fax: 1-919-468-6004
 Central Regional Sales & Service Office
 Phone: 1-972-267-9500 Fax: 1-972-267-5612
 Southwestern Regional Sales & Service Office
 Phone: 1-602-431-1412 Fax: 1-602-431-1437
 Northwest Regional Sales & Service Office
 Phone: 1-503-644-0323 Fax: 1-503-643-8108

EUROPE :
DISCO HI-TEC EUROPE GmbH
 Liebigstrasse 8 D-85551 Kirchheim b. Muenchen Germany
 Phone: 49-89-909030-0 Fax: 49-89-90903-199
DISCO HI-TEC FRANCE SARL Provence Head Office
 Phone: 33-4-42-91-00-20 Fax: 33-4-42-91-00-29
DISCO HI-TEC U.K. LTD.
 Phone: 44-1342-313165 Fax: 44-1342-313177
DISCO HI-TEC MOROCCO SARL
 Phone: 212-6-136-94-04 Fax: 212-22-97-38-88