

Water Temperature Control Unit

DTU162

Higher Dicing Quality with Lower Environmental Impact



Support for Dicing Quality

DTU162 keeps both spindle coolant and wheel coolant at a constant temperature and suitable pressure. It thereby helps manage expansion, contraction, and other undesirable phenomena caused by water temperature fluctuation.

Reduced Environmental Impact

By circulating used wheel coolant and precipitating and filtering water-borne debris, DTU162 significantly reduces water consumption and environmental impact. Further, the refrigerant used is R-407C, a completely non-ozone-depleting gas.



ISO 9001
JQA-0954



REGISTERED ORGANIZATION
No. E892-ISO14001



Water Temperature Control Unit DTU162

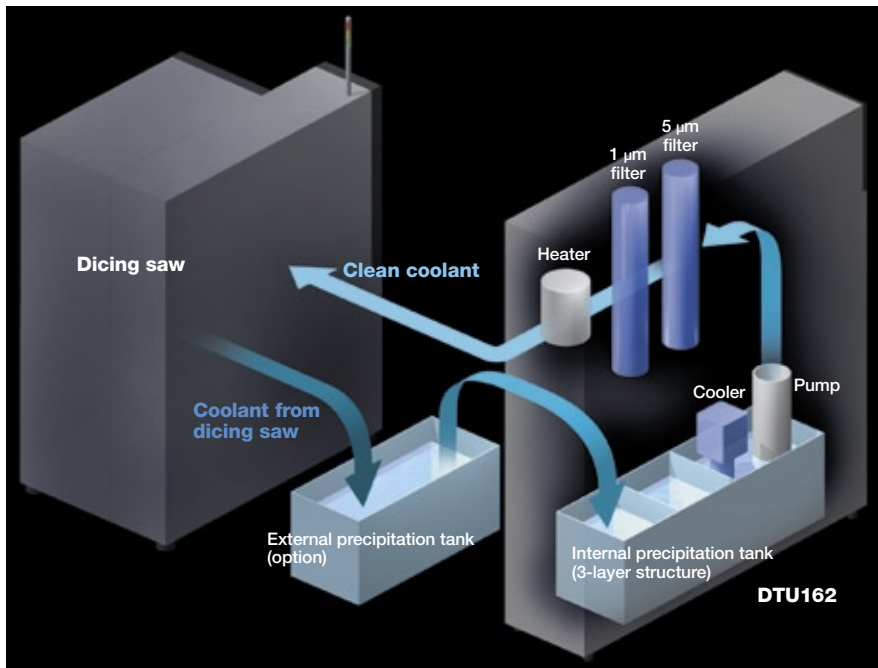


Diagram of wheel coolant flow



Small Footprint

The efficient design of DTU162's interior makes possible a very small unit footprint.

Easy Maintenance

- Use of long 20" filters allows for less frequent exchanges.
- Interior layout designed for maximum ease of regular maintenance.

Applications

Glass, ceramics, ferrite, and other electronic component materials.

DTU162 Specification

Wheel coolant system	Cooling capacity	W	Approx. 600 (at 20 °C)
	Heating capacity	W	Approx. 2000
	Pumping capacity	L/min	10
	Tank volume	L	84
	Filter cartridge length	mm	508
	Filter mesh size 1	µm	5
Spindle coolant system	Filter mesh size 2	µm	1
	Cooling capacity	W	Approx. 600
	Heating capacity	W	Approx. 600
	Pumping capacity	L/min	6
	Tank volume	L	7
	Temperature setting range	Cutting water	°C
	Spindle coolant water	°C	15~30
Temperature fluctuation range*			
	Cutting water	°C	Within ±1.0
	Spindle coolant water	°C	Within ±1.0
Utilities	Power supply	200 ~ 240 V AC±10 %, 3-phase	
	For other than the above voltages, a transformer is necessary.		
Power consumption			
	When heater is at max. capacity	kW	5.4
	When temperature is stabilized	kW	2.2
	Max. power	kVA	9.3
Refrigerated cooling water			
	Feed water pressure	MPa	0.2~0.5
	Required flow rate	L	7 (when feed water temperature is 25 °C)**
	Machine dimensions (W x D x H)	mm	430 x 900 x 1,500
	Machine weight	kg	Approx. 240 (when dry) Approx. 360 (when running with full tank)

* When both wheel coolant and spindle coolant are 20 - 25 °C.

** The required flow rate will vary by temperature.

Environmental conditions


- Keep room temperature fluctuations within the same as room temperature between 20-25 °C (fluctuations within ±1 °C).
- The machines should be used in an environment, free from external vibration. Do not install machine near a ventilation opening, heat generation equipment or oil mist generating parts.
- This machine uses water. In case of water leakage, please install the machine on the floor with sufficient waterproofing and drainage treatments.

* Because it circulates wheel coolant, DTU162 may not be appropriate for applications in which purified water is used.

* All pressures specified above are gauge pressures.

* As the above specification may change due to technical modifications. Please confirm when placing your order.

* For further information, please contact your local sales representative.

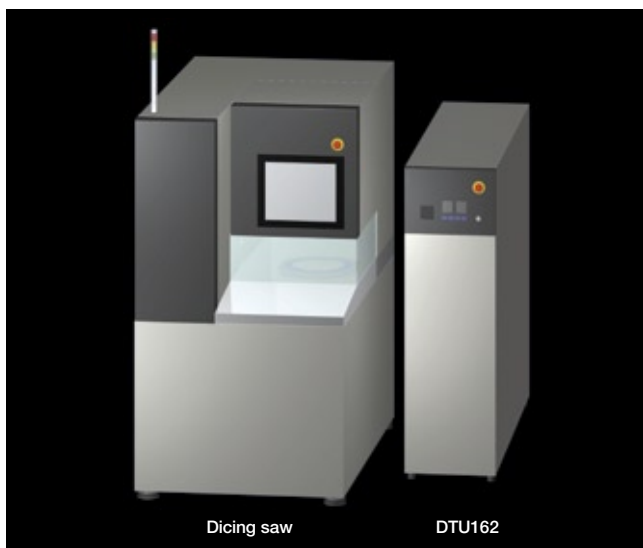

DISCO



ASIA :
DISCO HI-TEC (SINGAPORE) PTE. LTD.
 Blk 2 Kaki Bukit Ave.1 #03-06/08 Kaki Bukit
 Industrial Estate Singapore 417938
 Phone: 65-6747-3737 Fax: 65-6745-0266
DISCO HI-TEC (MALAYSIA) SDN. BHD.
 Penang Regional Office
 Phone: 60-4-844-5302 Fax: 60-4-645-2285
DISCO HI-TEC (THAILAND) CO., LTD.
 Phone: 66-2-618-8441 Fax: 66-2-618-8440
DISCO TECHNOLOGY (SHANGHAI) CO., LTD.
 Area E, 3rd Floor, Building A1 No.381 FuTeXiYi Road,
 WaiGaoQiao Free Trade Zone, Shanghai 200131 P.R. CHINA
 Phone: 86-21-58662516 Fax: 86-21-58662517
 Tianjin Service & Technical Support Center
 Phone: 86-022-24381973 Fax: 86-022-24381637
 Dongguan Service & Technical Support Center
 Phone: 86-769-86334981 Fax: 86-769-86334559
 Suzhou Office
 Phone: 86-512-67629081 Fax: 86-512-67629082

Chengdu Office
 Phone: 86-28-86528592 Fax: 86-28-86528591

ASIA AGENT :
New Tronics Co., Ltd.
 Flat F, 11th Floor, Valiant Ind. Bldg. 2-12 Au Pui Wan Street,
 Fotan Shantin, N.T. HONG KONG
 Phone: 852-26871431 Fax: 852-26874283
Happy Pole, Ltd.
 8F-1, No.41 Section 2, Roosevelt Road Taipei, Taiwan R.O.C.
 Phone: 886-2-23930651 Fax: 886-2-23943943
Aurotech Corporation
 2021 Buencamino Street Alabang, Muntinglupa PHILIPPINES
 Phone: 63-2-809-0155 Fax: 63-2-807-7419
DHK Solution Corporation
 13F, Sankok Jaddan Building, 1337-31, Seocho-dong, Seocho-gu, Seoul, Korea
 Phone: 82-2-3415-1122 Fax: 82-2-3415-1441
U.S.A. :
DISCO HI-TEC AMERICA, INC.
 3270 Scott Blvd. Santa Clara, CA 95054-3011 U.S.A.
 Phone: 1-408-987-3776 Fax: 1-408-987-3785

Eastern Regional Sales & Service Office
 Phone: 1-603-656-9019 Fax: 1-603-656-9018
 Southeastern Regional Sales & Service Office
 Phone: 1-919-468-6003 Fax: 1-919-468-6004
 Central Regional Sales & Service Office
 Phone: 1-972-267-9500 Fax: 1-972-267-5612
 Southwestern Regional Sales & Service Office
 Phone: 1-602-431-1412 Fax: 1-602-431-1437
 Northwest Regional Sales & Service Office
 Phone: 1-503-644-0323 Fax: 1-503-643-8108

EUROPE :
DISCO HI-TEC EUROPE GmbH
 Liebigstrasse 8 D-85551 Kirchheim b. Muenchen Germany
 Phone: 49-89-930303-0 Fax: 49-89-930303-199
DISCO HI-TEC FRANCE SARL Provence Head Office
 Phone: 33-4-42-91-00-20 Fax: 33-4-42-91-00-29
DISCO HI-TEC U.K. LTD.
 Phone: 44-1342-313165 Fax: 44-1342-313177
DISCO HI-TEC MOROCCO SARL
 Phone: 212-6-136-94-04 Fax: 212-22-97-38-88

DISCO CORPORATION
 13-11 Omeri-Kita 2-chome, Ota-ku, Tokyo 143-8580, Japan
 Tel: 03-4590-1100 Fax: 03-4590-1075 • www.disco.co.jp